

CompTIA

220-1001 Exam

CompTIA A+ Core 1

**Questions & Answers
Demo**

Version: 41.0

Topic 1, Exam Pool A

Question: 1

Laura, a customer, has instructed you to configure her home office wireless access point.

She plans to use the wireless network for finances and has requested that the network be setup with the highest encryption possible.

Additionally, Laura knows that her neighbors have wireless networks and wants to ensure that her network is not being interfered with by the other networks.

She requests that the default settings be changed to the following.

Wireless Name: HomeWiFi

Shared Key: CompTIA

Router Password: Secure\$1

Finally, Laura wants to ensure that only her laptop and Smartphone can connect to the network.

Laptop: IP Address 192.168.1.100

Hardware Address: 00:0A:BF:03:C4:54

Smartphone: IP Address 192.168.1.101

Hardware Address: 09:2C:D0:22:3F:11

INSTRUCTIONS

Configure Laura's wireless network using the network adapter window.

If at any time you would like to bring back the initial state of the situation, please click the Reset All button.

The screenshot displays the 'Laura's Wireless Configuration' interface. At the top, there are three tabs: 'WIRELESS SETUP' (selected), 'NETWORK FILTER', and 'ADMINISTRATOR TOOLS'. Below the tabs, the 'Wireless Network Settings' section includes: 'Enable Wireless' (checked), 'Wireless Network Name' (HomeWiFi, with a note '(Also called the SSID)'), 'Wireless Channel' (1), 'Disable SSID Broadcast' (unchecked), and '802.11g Only Mode' (unchecked). The 'Wireless Security Mode' section shows 'Security Mode' set to 'Enable WPA2 Wireless Security (enhanced)'. The 'WPA2' section includes 'Passphrase' and 'Confirmed Passphrase', both set to 'CompTIA'.

Laura's House

Wireless Network Name: **Default**
Security Mode: **Open**
Wireless Channel: **11**

Wireless Network Name: **MyWi**
Security Mode: **WEP**
Wireless Channel: **6**

Wireless Network Name: **PatsWiFi**
Security Mode: **WEP**
Wireless Channel: **11**

Laura's Wireless Configuration

WIRELESS SETUP **NETWORK FILTER** **ADMINISTRATOR TOOLS**

Please enter the same password into both boxes for confirmation.

Password:

Verify Password:

Laura's Wireless Configuration

WIRELESS SETUP **NETWORK FILTER** **ADMINISTRATOR TOOLS**

Wireless Network Settings

Enable Wireless:

Wireless Network Name: (Also called the SSID)


Wireless Channel:

Disable SSID Broadcast:

802.11g Only Mode:

Wireless Security Mode


Security Mode:

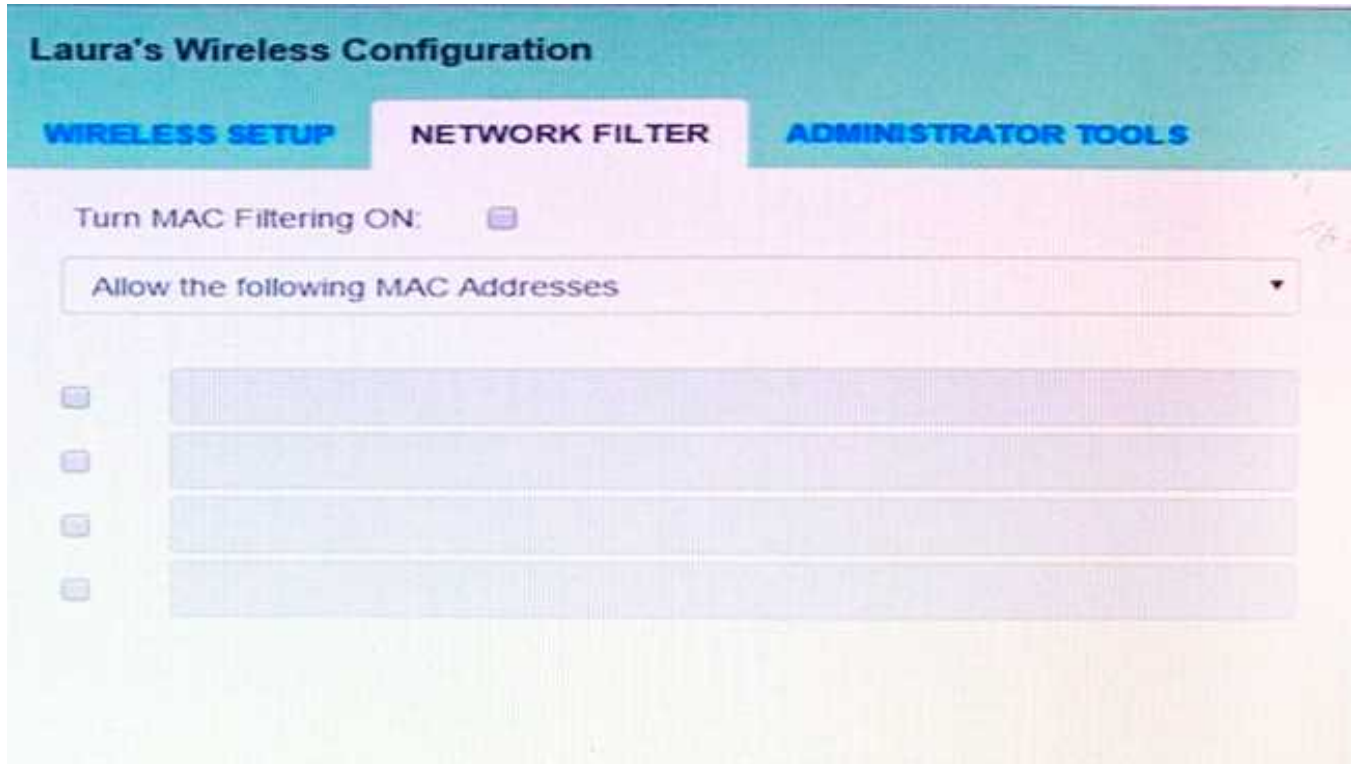

Answer: See the explanation below

Explanation:

solution as

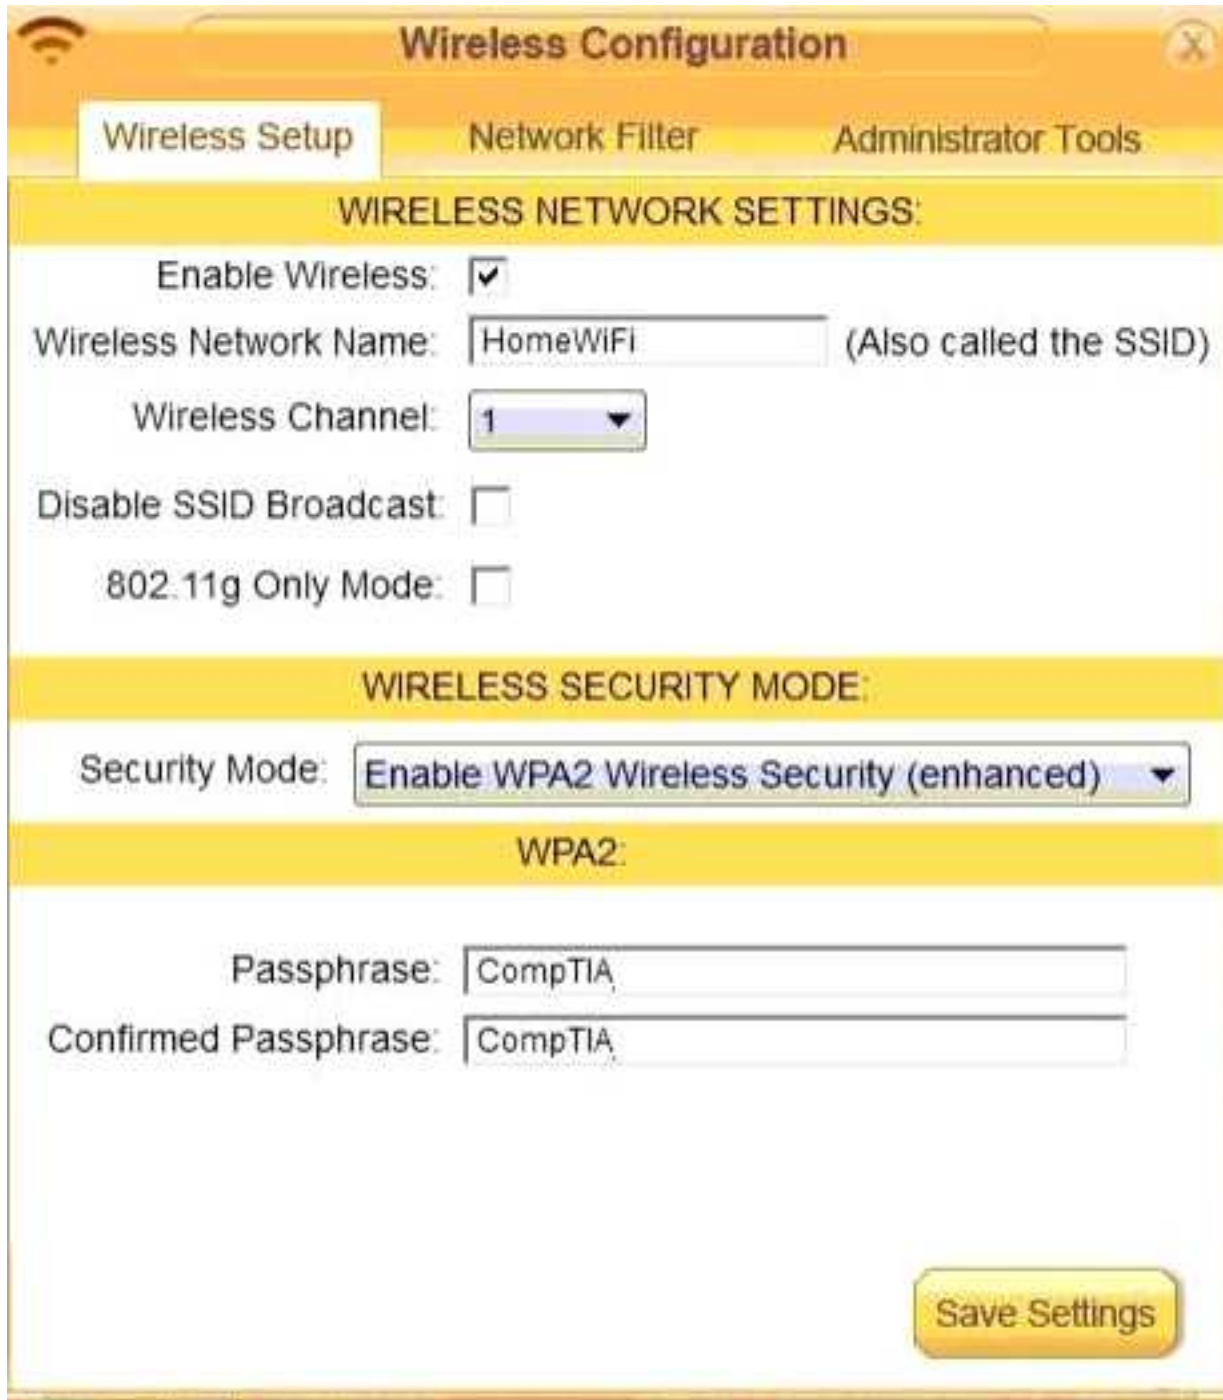

The image shows a 'Wireless Configuration' window with a yellow header and three tabs: 'Wireless Setup', 'Network Filter', and 'Administrator Tools'. The 'Wireless Setup' tab is active. Below the tabs is a yellow bar with the text 'WIRELESS NETWORK SETTINGS:'. Under this bar, there are several settings: 'Enable Wireless' with a checked checkbox; 'Wireless Network Name' with a text box containing 'HomeWiFi' and a note '(Also called the SSID)'; 'Wireless Channel' with a dropdown menu showing '1'; 'Disable SSID Broadcast' with an unchecked checkbox; and '802.11g Only Mode' with an unchecked checkbox. Below these is another yellow bar with the text 'WIRELESS SECURITY MODE:'. Under this bar, there is a 'Security Mode' dropdown menu showing 'Enable WPA2 Wireless Security (enhanced)'. Below that is a yellow bar with the text 'WPA2:'. Under this bar, there are two text boxes: 'Passphrase' containing 'CompTIA' and 'Confirmed Passphrase' also containing 'CompTIA'. At the bottom right of the window is a yellow button labeled 'Save Settings'.

Wireless Configuration

Wireless Setup Network Filter Administrator Tools

WIRELESS NETWORK SETTINGS:

Enable Wireless:

Wireless Network Name: (Also called the SSID)

Wireless Channel:

Disable SSID Broadcast:

802.11g Only Mode:

WIRELESS SECURITY MODE:

Security Mode:

WPA2:

Passphrase:

Confirmed Passphrase:

Save Settings



The image shows a 'Wireless Configuration' window with three tabs: 'Wireless Setup', 'Network Filter', and 'Administrator Tools'. The 'Network Filter' tab is active. It contains a checked checkbox for 'Turn MAC Filtering ON'. Below this is a dropdown menu set to 'Allow the following MAC Addresses'. A table with the title 'MAC Address' lists four entries, each with a checkbox and a text input field. The first two entries are checked and contain the MAC addresses '00:0A:BF:03:C4:54' and '09:2C:D0:22:3F:11'. The last two entries are unchecked and have empty text fields. A 'Save Settings' button is located at the bottom right of the window.

MAC Address	
<input checked="" type="checkbox"/>	00:0A:BF:03:C4:54
<input checked="" type="checkbox"/>	09:2C:D0:22:3F:11
<input type="checkbox"/>	
<input type="checkbox"/>	



The image shows a mobile device screen titled "Wireless Configuration" with a close button (X) in the top right corner. Below the title bar are three tabs: "Wireless Setup", "Network Filter", and "Administrator Tools". The "Administrator Tools" tab is selected. Underneath the tabs is a yellow header with the text "ADMIN PASSWORD". Below this header, the instruction reads: "Please enter the same password into both boxes for confirmation." There are two input fields: "Password:" and "Verify Password:". Both fields contain the text "Secure\$1". At the bottom right of the screen is a yellow button labeled "Save Settings".

Question: 2

DRAG DROP

Drag each mobile technology to the description of its use. Some answers will not be used.

Description

Devices use haptic confirmation for sharing data wirelessly.

Devices are paired using a code for sharing data wirelessly.

Devices are placed in close proximity within line of sight for sharing data wirelessly.

Devices are connected via a wire for sharing data or connectivity.

Wireless technology

NFC

Hotspot

IR

Tethering

Bluetooth

Cellular

Lightning

Answer:

Explanation:

1. NFC
2. Bluetooth
3. IR
4. Tethering

Question: 3

DRAG DROP

A customer, Ann, has requested two custom PCs, one to be used for gaming and the other to be used as a virtualization workstation for her business.

The gaming PC should support the latest games and gaming peripherals.

The virtualization workstation should be able to host several production virtual machines as part of Ann's home business.

INSTRUCTIONS

Use the tabs at the top to switch between the PCs.

Objects should be placed on the appropriate slot/display areas and can only be used once.


All slot/display areas should be filled.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.



Answer:

Explanation:

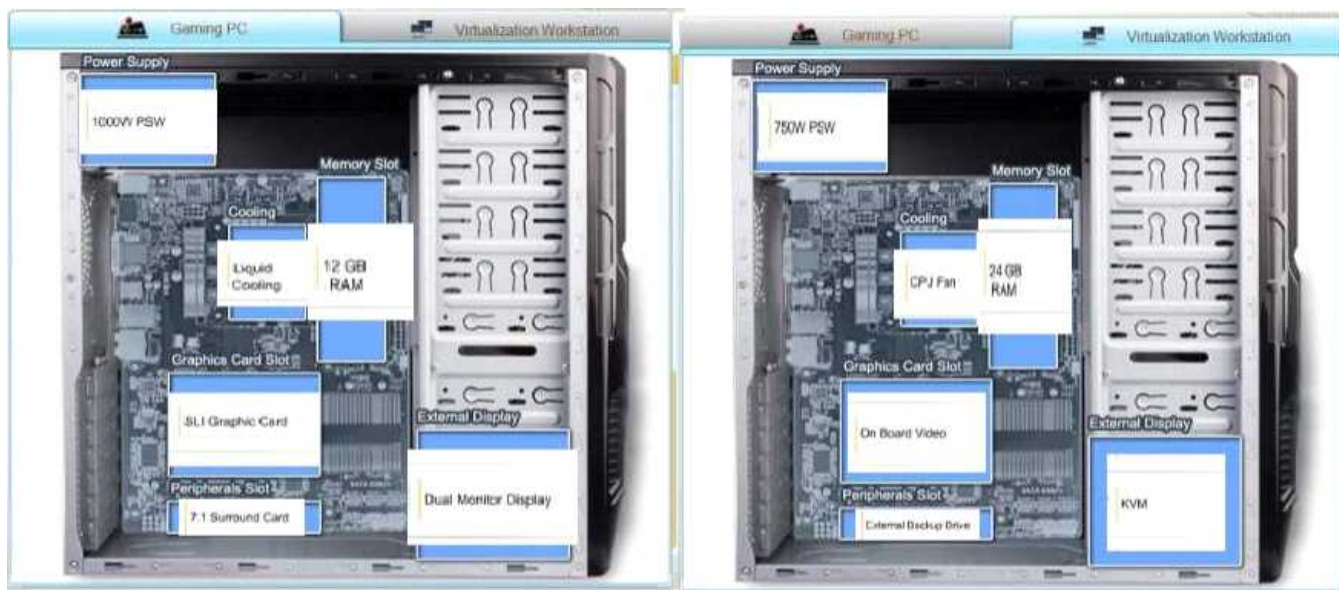

Question: 4


The network administrator has changed the IP address of ComputerA from 192.168.1.20 to 10.10.10.20 and now jane, a user, is unable to connect to file shares on ComputerA from ComputerB using the computer name.

INSTRUCTIONS

Using the available tools, resolve the connectivity issues.

After troubleshooting the issue, verify a successful connection.

If at any time you would like to bring back the initial state of the simulation? please click the Reset All button.

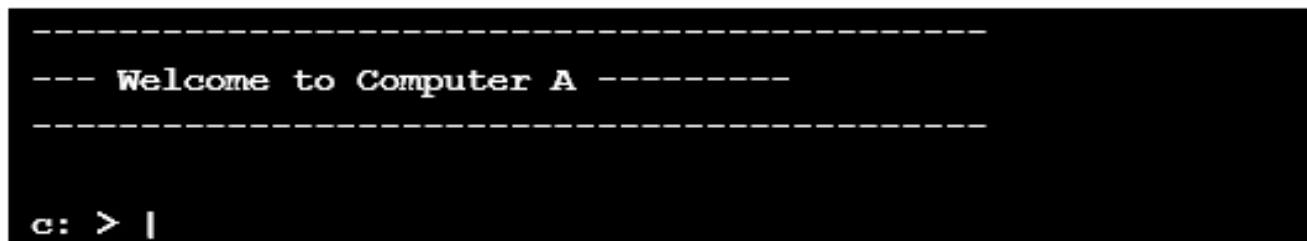

```
Reply from 10.10.10.10.30: bytes=32 time=13ms FTL=52
Reply from 10.10.10.10.30: bytes=32 time=13ms FTL=52

Ping statistics for 10.10.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 13ms, Maximum = 13ms, Average = 13ms

c:\> ?
    % Invalid input detected, query help for valid commands.
c:\> help

    ipconfig
    nslookup
    ping
    tracert

    help

c:\> nslookup
    % Invalid input detected, query help for valid commands.
c:\> nslookup
    % Invalid input detected, query help for valid commands.
c:\> help

    ipconfig
    nslookup
    ping
    tracert
    help

c:\>
```

```
-----  
--- Welcome to Computer B -----  
-----  
  
c:\>
```

```
-----  
  
c:\> ipconfig  
  
Windows IP Configuration  
  
Ethernet adapter Ethernet:  
  
    Connection-specific DNS Suffix . . . . . : local.net  
    IPv4 Address . . . . . : 10.10.10.30  
    Subnet Mask . . . . . : 255.255.255.0  
    Default Gateway . . . . . : 10.10.10.1  
  
c:\> ping 10.10.10.20  
  
Pinging 10.10.10.20 with 32 bytes of data:  
Reply from 10.10.10.20: bytes=32 time=13ms TTL=52  
Reply from 10.10.10.20: bytes=32 time=13ms TTL=52  
Reply from 10.10.10.20: bytes=32 time=13ms TTL=52  
Reply from 10.10.10.20: bytes=32 time=13ms TTL=52  
  
Ping statistics for 10.10.10.20:  
    Packets: Sent = 4, Received = 4, Loat = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 13ms, Maximum = 13ms, Average = 13ms  
  
c:\> nslookup  
    % Invalid input detected, query help for valid commands.  
c:\>  
computerB
```

Answer: See the

explanation below:

Explanation:

We need to flush the DNS to have the new IP address assigned to the same computer name. Use the ipconfig/flushdns command.

Question: 5

A technician is troubleshooting what appears to be a RAM issue on a PC. Which of the following symptoms would indicate if this is a RAM issue?

- A. POST code beeps
- B. Distended capacitors
- C. Continuous reboots
- D. Wrong BIOS time

Answer: C

Explanation:

Thank You For Trying 220-1001 PDF Demo

To try our 220-1001 Premium Files visit link below:

<https://examsland.com/latest-exam-questions/220-1001/>

Start Your 220-1001 Preparation

Use Coupon **EL25 for extra 25% discount on the purchase of Practice Test Software.**