

# Cisco

## Exam 400-151

### CCIE Data Center (v2.0)

Version: Demo

**[ Total Questions: 10 ]**

**Question No : 1**

Which two descriptions of the Cisco 7000 RISE Technology are true? (Choose two.)

- A. RISE enables remote inspection of control plane traffic to address security concerns.
- B. RISE can provide ADC offload freeing resources in the ADC.
- C. RISE enables remote inspection of data plane traffic to address security concerns
- D. RISE enables a physical appliance to appear as a service module in the Cisco Nexus 7000 chassis
- E. RISE can be utilized to provide management capabilities for non-Cisco routers.

**Answer: D,E**

**Question No : 2**

Refer to the exhibit.

```
[admin@ucsc ~]$ df -h
Filesystem                Size      Used Avail Use% Mounted on
/dev/mapper/VolGroup00-LogVol00
                          18G       4.4G   13G   24% /
/dev/sda1                  99M       19M    77M   20% /boot
/dev/mapper/VolGroup01-LogVol00
                          40G       40G     0 100% /bootflash
tmpfs                      7.9G     0       7.9G   0% /dev/shm
```

Some time ago you enabled statistic collection with the internal stats database and received a report that the /bootflash partition is full. Which two options to resolve the issue are true? (Choose two)

- A. Add logical volume to logicalVol01
- B. Stop pmon and drop PostgreSQL DB
- C. Add additional physical volume to VoiGroup01
- D. Unmount and format /bootflash
- E. Configure external statistics DB

**Answer: B,E**

**Question No : 3**

Which two characteristics of an IoT network are true? (Choose two.)

- A. IoT networks are 100% reliable.
- B. IoT networks must be designed for low-powered devices.
- C. The transmission rate in an IoT network is consistent.
- D. IoT networks are bandwidth constrained.
- E. IoT networks use IS-IS for routing.

**Answer: B,D**

**Question No : 4**

Which option is a valid overlay interface configuration and configures the OTV edge device as a secondary OTV adjacency server?

- A. interface Overlay 1  
otv join-interface e 101/1/48 otv  
adjacency-server secondary  
otv use-adjacency-server primary 10.1.1  
1 otv extend-vlan 5-10
- B. interface Overlay 1  
otv join-interface e1/2  
otv adjacency-server unicast-only  
otv use-adjacency-server 10 111 unicast-only  
otv extend-vlan 5-10
- C. interface Overlay 1  
otv join-interface e101/1/48  
otv adjacency-server unicast-only  
otv use-adjacency-server 10 1.1 1 unicast  
only otv extend-vlan 5-10
- D. interface Overlay 1 otv  
join-interface e1/2  
otv use-adjacency-sen/er 10.1 1 1 10.1.1 2  
otv extend-vlan 5-10

**Answer: B**

**Question No : 5**


Which two types of traffic are consolidated using Cisco unified Fabric? (Choose two)

- A. voice traffic
- B. InfiniBand traffic
- C. video traffic
- D. SAN storage traffic
- E. network traffic

**Answer: D,E**

**Question No : 6**

Refer to the exhibit.

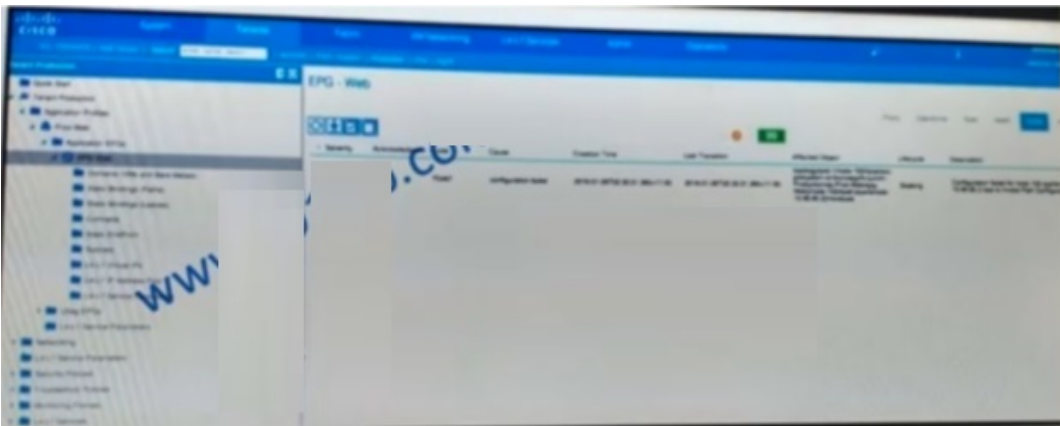

Your application has a reduced health score. Upon inspection, you find a fault that impacts the health score. The fault currently is in the soaking lifecycle state. Which two options are possible next steps while in this state? (Choose two)

- A. Acknowledge the fault, which immediately clears it from the system
- B. Once the soaking timer expires the fault ceases and no change is expected in severity level.
- C. The condition ceases by itself and goes into the soaking-clearing state
- D. The condition ceases by itself and automatically clears the fault
- E. The soaking timer expires and moves to the Raised severity level

**Answer: C,E**

**Question No : 7**

Refer to the exhibit.

Slot ID	Product Name	Firmware Version	Vendor ID	Device ID	Sub-ID
1	Intel(R) E750 1 Gbps Network	0x800000AA 1.008.2	0x8086	0x1000	0x0000
3	UCS VIC 1225 10Gbex 2 port vNIC	4.0066	0x1137	0x0000	0x0000
2	Qlogic QL22752 4 port vNIC vHBA	N/A	0x1000	0x0000	0x0000
4	Cisco UCS VIC 1225 10Gbex 2 port vNIC	25.11.1-0235			

How many virtual adapters (vNIC and vHBA) can be added to this host?

- A. 128
- B. 130
- C. 256
- D. 258

Answer: C

**Question No : 8**

Which request obtains the switchname,in JSON format,from a cisco Nexus device via the NXAPI?

A)

```
{  
  "ins_api":{  
    "version": "1.0",  
    "type": "cli show",  
    "chunk": "0",  
    "sid": "1",  
    "input": "show switchname",  
    "out_format": "json"  
  }  
}
```

B)

```
{  
  "ins_api":{  
    "version": "1.0",  
    "type": "nx_api_show",  
    "chunk": "0",  
    "sid": "1",  
    "input": "show switchname",  
    "out_format": "json"  
  }  
}
```

C)

```
{  
  "ins_api": {  
    "version": "1.0",  
    "type": "nxapi_show",  
    "chunk": "0",  
    "sid": "1",  
    "input": "show switchname",  
    "out_format": "json"  
  }  
}
```

D)

```
{  
  "ins_api": {  
    "version": "1.0",  
    "type": "show",  
    "chunk": "0",  
    "sid": "1",  
    "input": "show switchname",  
    "out_format": "json"  
  }  
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

**Answer: A**

**Question No : 9**


Which two statements about the Cisco Open SND Controller are true? (Choose two.)

- A. It is a commercial distribution based on the OpenFlow controller.
- B. Your own, new network service functions can be added via Java APIs.
- C. Security is enforced by using the Open Services Gateway Initiative framework.
- D. The controller is available as an appliance only.
- E. It can be used in multivendor environments.

**Answer: B,E**

**Question No : 10**

Refer to the exhibit.

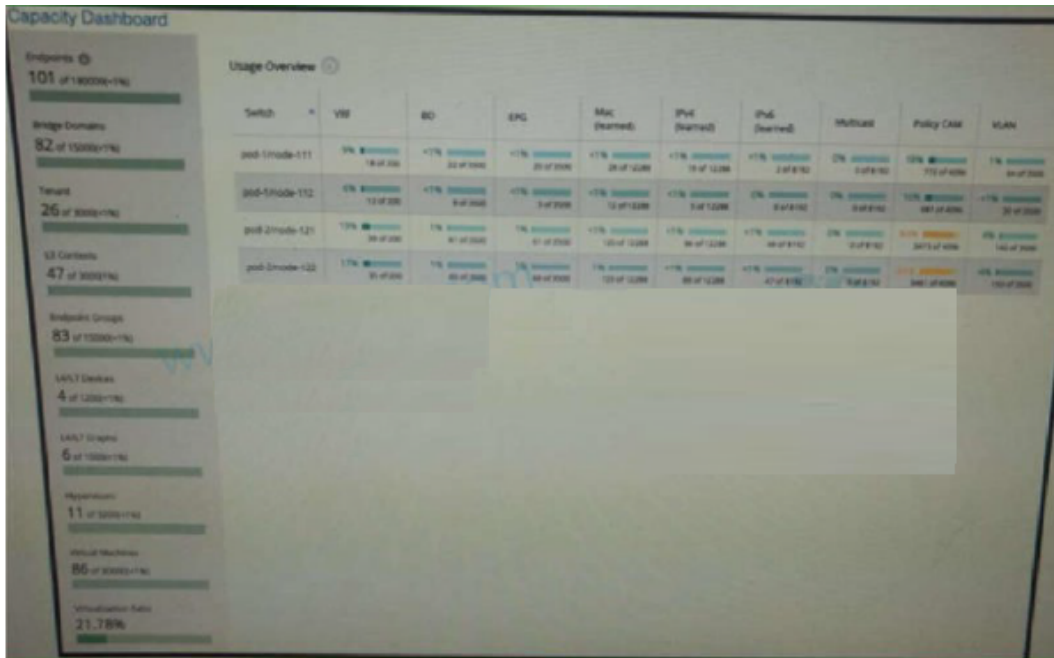

Which statement about the displayed ACI Fabric is true?

- A. This fabric is configured for VMM integration
- B. The number of user-defined tenants is 26
- C. The capacity information shown is typical of multipod deployments
- D. Too many endpoints are connected to nodes 121 and 122
- E. Integrated Layer 4 Layer 7 services are not in use

**Answer: B**

**Thank You For Trying 400-151 PDF Demo**

**To try our 400-151 Premium Files visit link below:**

**<https://examsland.com/latest-exam-questions/400-151/>**

**Start Your 400-151 Preparation**

**Use Coupon **EL25** for extra 25% discount on the purchase of Practice Test Software.**