


# BICSI Registered Communications Distribution Designer – RCDDv14

Questions & Answers Demo

### Version: 4.0

| Question: 1   |                                   |
|---|-----------------------------------|
| What is the MINIMUM clearance needed between the front of the fixture for most installations? | e telephone booth and any wall or |
| A. 300 mm (12 in)   |                                   |
| B. 450 mm (18 in)   |                                   |
| C. 610 mm (24 in)   |                                   |
| D. 914 mm (36 in)   |                                   |
| E. 2.4 m (8 ft)   |                                   |
|   | Answer: C                         |
| Explanation:  |                                   |
|   |                                   |
| Question: 2   |                                   |
| E 1.11.9  |                                   |
| Exhibit:  |                                   |

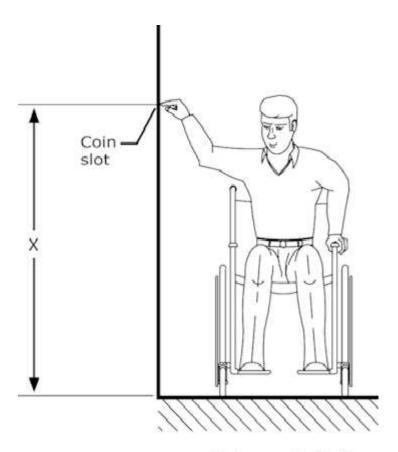

#### Side reach limits

A pay telephone using coins needs to be installed in a public are

- a. In the specifications, it is required that the telephone shall meet the ADA (Americans with Disability Act) requirement for side reach using a wheelchair. What will be the maximum reachable height or the value of "X"?
- A. 760 mm (30 in)
- B. 864 mm (34 in)
- C. 1170 mm (46 in)
- D. 1220 mm (48 in)
- E. 1370 mm (54 in)

| Answer: E |  |
|-----------|--|

Explanation:

#### **Question: 3**

A telephone facility and an electrical facility are required in a tunnel. To reduce the effects of EMI and eliminate the need for additional shielding of the cables, where would each facility be placed?

- A. On opposite sides of the tunnel
- B. On the same sides of the tunnel
- C. Together on the same pathway for easy access and maintenance


- D. One on the top part and one on the bottom part of the same side of the tunnel
- E. On the exterior of the tunnel

Answer: A

Explanation:

### Question: 4



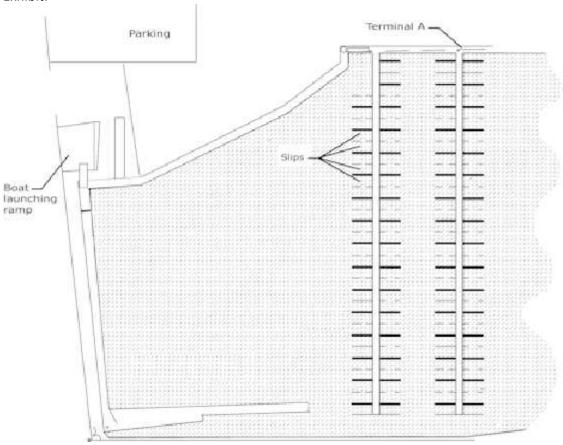

In this future marina layout, what would be the pre-cabling guideline to follow for the terminal A?

- A. Place distribution cable onto the dock and terminate in a suitable cabinet or enclosure. Run service drop to each boat slip.
- B. Provide one or two pair cables from the boat slips to a distribution terminal on the closest point of land
- C. Pre-cable each boat slip during construction.
- D. For security, each run should be terminated in the patch panel/ cross-connect at the dockmaster or marina office.

Explanation:

| Explanation:   |  |
|--|--|
| Question: 5  |  |
|  | electrical power stations provide isolation against a rise in potential of de drainage protection against longitudinally-induced voltages? |
| A. Isolating transformers B. Neutralizing transformers C. Mutual drainage reactors D. Unit-type neutralizing trans E. 2-winding neutralizing trans |  |
|  | Answer: A  |

## Thank You For Trying RCDDv14 PDF Demo

To try our RCDDv14 Premium Files visit link below:

https://examsland.com/latest-exam-questions/RCDDv14/

**Start Your RCDDv14 Preparation** 

Use Coupon EL25 for extra 25% discount on the purchase of Practice Test Software.